Huebsch®
YOUR SMART LAUNDRY PARTNER



On-Premises
75-lb Tumble Dryer

Our single-pocket tumble dryers* feature concentrated airflow and sealed cylinder rims to ensure energy savings. This superior drying performance helps laundries maximize throughput to meet the daily workload every time. Our tumble dryers are designed with fewer moving parts, so you'll face less maintenance and wear and tear.

Efficient

High-performance heater box increases energy efficiency and reduces drying times to help on-premises laundries increase throughput, while decreasing operating costs.


Performance

Available in S30 lb, 55 lb, 75 lb, 120 lb, 170 lb and 200 lb capacities, there's a tumble dryer to meet the needs of any on-premises laundry.



Galaxy™

The Galaxy Control offers the flexibility of 30 programmable cycles combined with the accuracy of our moisture-sensing technology saving time and energy increasing the life of your linens, saving time and energy.




Dual Digital

With features including one-touch cycle repeat, automatic extended tumble and a large digital countdown display, it's simple to set your drying time, temperature and cool down with the Dual Digital Control.

* Not all models are available in all markets. In order to highlight key details, machine images do not adhere to a standard scale.

On-Premises **75-lb Tumble Dryer** Specifications

MODEL			HT075
CONTROL OPTION			Galaxy, Dual Digital
CAPACITY - lb (kg)			75 (34)
OVERALL WIDTH - in (mm)			38.5 (978)
OVERALL DEPTH -in (mm)		Standard	53.0 (1346)
		ProCapture	53.0 (1346)
OVERALL HEIGHT -in (mm)		Standard	77.3 (1963)
		ProCapture	76.5 (1943)
CYLINDER DIAMETER - in (mm)			37.0 (940)
CYLINDER DEPTH - in (mm)			36.0 (914)
CYLINDER VOLUME - cu. ft. (liters)			22.4 (634)
DOOR OPENING SIZE - in (mm)			26.9 (683)
HEAT INPUT POWER		Gas	Standard - 165,000 Btu/hr ProCapture - 150,000 Btu/hr
		Steam	133,900 Btu/hr
		Electric	36kW
GAS CONNECTIONS* - NPT			1/2
PLUMBING CONNECTIONS - STEAM - NPT			3/4
AIR OUTLET -in (mm)		Standard	8 (203)
		ProCapture	10 (254)
MOTOR -hp		Fan	Standard - 0.5 ProCapture - 1.5
		Cylinder	Standard - 0.5 ProCapture - 0.5
AIRFLOW - cfm			800 (378)
ELECTRICAL SPECS - amps	Gas & Steam		
	B	100-120V/50/60/1	Standard - 12
	X	200-240V/50/60/1/3	Standard - 7 ProCapture - 18
	N	440-480V/50/60/3	Standard 3
	Q	200-240/50-60/3	ProCapture - 9
	Electric		
	G	230-240V/50/60/3	90
	L	460-480V/50/60/3	45
SHIPPING DIMENSIONS APPROX. - in (mm)		Width	41.5 (1054)
		Depth	56.0 (1422)
		Height	Gas & Electric - 81.0 (2057) Steam - 83.5 (2121)
NET WEIGHT - lb (kg)		Gas	Standard - 715 (324) ProCapture - 740 (336)
		Steam	740 (336)
		Electric	730 (331)
SHIPPING WEIGHT - lb (kg)		Gas	Standard - 760 (345) ProCapture - 790 (360)
		Steam	800 (363)
		Electric	780 (354)
AGENCY APPROVALS			UL

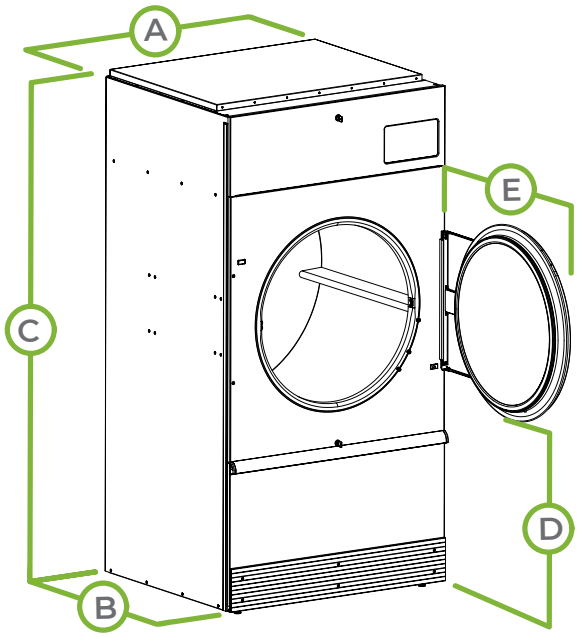

MODEL	HT075
A. OVERALL WIDTH - in (mm)	38.5 (978)
B. OVERALL DEPTH - in (mm)	53.0 (1346)
C. OVERALL HEIGHT - in (mm)	Standard - 77.3 (1963) ProCapture - 76.5 (1943)
D. DOOR BOTTOM TO FLOOR - in (mm)	29.2 (740)
E. DOOR SWING - in (mm)	33.9 (860)

* LP gas available for 75 lb capacity only. Field conversion kits available for other capacities.

ProCapture is not available with the Dual Digital control.

Tumble dryer models are made to suit a variety of electrical service characteristics. See your Huebsch distributor for specifications. For further details on installation, refer to Installation, Operation and Maintenance instructions supplied with the tumble dryer. Amperage ratings available in Installation Manual.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems are registered to ISO 9001.